

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/053907 A1**


- (51) International Patent Classification<sup>7</sup>: **H01H 13/70** (74) Agents: BEISSEL, Jean et al.; Office Ernest T. Freylinger S.A., B.P. 48, 8001 Strassen (LU).
- (21) International Application Number:  
PCT/EP2003/050962 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 8 December 2003 (08.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02102705.7 9 December 2002 (09.12.2002) EP (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): IEE INTERNATIONAL ELECTRONICS & ENGINEERING S.A. [LU/LU]; Zone Industrielle, 6468 Echternach (LU).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): BIECK, Werner [DE/DE]; Auf Probert, 25, 54459 Wiltingen (DE). CHABACH, Driss [LU/LU]; 16, An Heirich, 9676 Noertrange (LU). DECOSTER, Yves [FR/BE]; 1a, rue des Marronniers, B-6760 Ethe (BE). RUGGIU, Manuel [LU/LU]; 94, rue de la Libération, 4798 Linger (LU).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) **Title:** FOIL-TYPE SWITCHING ELEMENT WITH DIELECTRIC LAYER

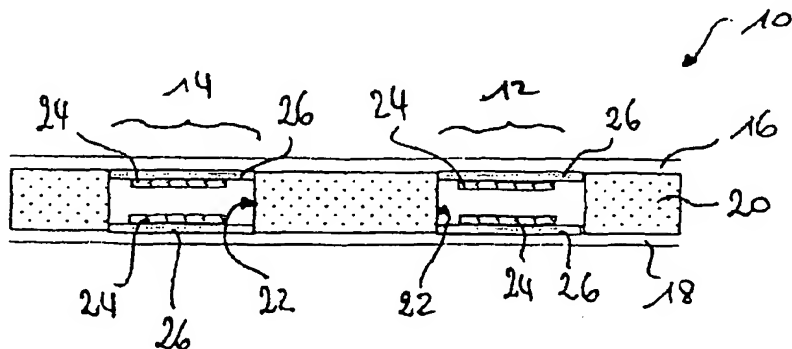

(57) **Abstract:** A foil-type switching element comprises a first carrier foil and a second carrier foil arranged at a certain distance from each other by means of a spacer, said spacer comprising at least one recess defining an active area of the switching element. At least two electrodes are arranged in the active area of the switching element between said first and second carrier foils in such a way that, in response to a pressure acting on the active area of the switching element, the first and second carrier foils are pressed together against the reaction force of

the elastic carrier foils and an electrical contact is established between the at least two electrodes. In order to avoid inhomogeneous deformation of the carrier foil due to the application of the electrodes, the switching element further comprises a layer of dielectric material, said dielectric material being applied onto said first carrier foil between the carrier foil and an electrode arranged on said first carrier foil, said layer of dielectric material covering at least an electrode region of the first carrier foil which is delimited by a generally outer periphery of the electrode arranged on said first carrier foil.

1/DRTS

10/538400  
JE17 Rec'd PCT/PTO 09 JUN 2005

1

## Foil-type Switching element with dielectric layer

### *Introduction*

The present invention relates to foil-type switching elements and more specifically to foil-type switching elements comprising at least one electrode structure printed on a flexible carrier foil.

5 The present invention relates to a foil-type switching element comprising a first carrier foil and a second carrier foil arranged at a certain distance from each other by means of a spacer. The spacer comprises at least one recess, which defines an active area of the switching element. At least two electrodes are arranged in the active area of the switching element between said first and second carrier foils in such a way that, in response to a pressure acting on the  
10 active area of the switching element, the first and second carrier foils are pressed together against the reaction force of the elastic carrier foils and an electrical contact is established between the at least two electrodes.

Several embodiments of such foil-type switching elements are well known in the art. Some of these switching elements are configured as simple switches  
15 comprising e.g. a first electrode arranged on the first carrier foil and a second electrode arranged on the second carrier foil in a facing relationship with the first planar electrode. The electrodes may be of a planar configuration covering essentially the entire surface of the respective carrier foil inside of the active area.

20 Other switching elements known in the art are configured as pressure sensors having an electrical resistance, which varies with the amount of pressure applied. In a first embodiment of such pressure sensors, a first electrode is arranged on the first carrier foil and a second electrode is arranged on the second carrier foil in facing relationship with the first electrode. At least one of  
25 the electrodes is covered by a layer of pressure sensitive material, e.g. a semi-conducting material, such that when the first and second carrier foils are pressed together in response of a force acting on the switching element, an

electrical contact is established between the first and second electrode via the layer of pressure sensitive material. The pressure sensors of this type are frequently called to operate in a so called "through mode".

5 In an alternative embodiment of the pressure sensors, a first and a second electrode are arranged in spaced relationship on one of the first and second carrier foils while the other carrier foil is covered with a layer of pressure sensitive material. The layer of pressure sensitive material is arranged in facing relationship to the first and second electrode such that, when said first and second carrier foils are pressed together in response to a force acting on the  
10 active area of the switching element, the layer of pressure sensitive material shunts the first and second electrode. These sensors are called to operate in the so-called "shunt mode".

The above-described switching elements can be manufactured cost-effectively and have proven to be extremely robust and reliable in practice.

15 The electrical response of such a switching element depends on the type of the electrodes, the presence of a possible layer of pressure sensitive material, the design of the electrodes and their arrangement within the active area of the switching element and finally on the physical contact, which is established between the electrodes in response to a force acting on the active area. The  
20 physical contact between the electrodes is determined by the mechanical response of the switching element in case of a force acting on the active area. This mechanical response depends on the elastic properties of the carrier foils, usually a PET foil, the lateral dimension of the active area and the distance between the two opposed carrier foils.

25 During the manufacturing process, the electrodes are usually printed onto their respective carrier foil. During this printing process, the carrier foil is subject to surface tensions on the boundary to the conductive material of printed electrode. These surface tensions may lead to a deformation of the carrier foil, which depending on the configuration of the electrode may be inhomogeneous  
30 over the active area of the switching element.

The uncontrolled deformations of the carrier foil and the printed electrode alter of course the configuration of the switching element in the active area. In fact, the distance between the two carrier foils differs from the nominal distance and is no longer uniform over the entire area of the active zone. Furthermore the electrodes being subject to the same deformations, the configuration of the electrode does no longer match with the specifications. These factors result in an uncontrolled modification of the mechanical response of the sensor and accordingly to a modification of its electrical response.

#### ***Object of the invention***

The object of the present invention is to provide an improved foil-type switching element.

#### ***General description of the invention***

This object is achieved by a foil-type switching element according to claim 1. This foil-type switching element comprises a first carrier foil and a second carrier foil arranged at a certain distance from each other by means of a spacer, said spacer comprising at least one recess defining an active area of the switching element. At least two electrodes are arranged in the active area of the switching element between said first and second carrier foils in such a way that, in response to a pressure acting on the active area of the switching element, the first and second carrier foils are pressed together against the reaction force of the elastic carrier foils and an electrical contact is established between the at least two electrodes. According to the invention, the switching element further comprises a layer of dielectric material, said dielectric material being applied onto said first carrier foil between the carrier foil and an electrode arranged on said first carrier foil, said layer of dielectric material covering at least an electrode region of the first carrier foil which is delimited by a generally outer periphery of the electrode arranged on said first carrier foil.

The electrode region in which the dielectric material is applied is delimited by a generally convex outline circumscribing the electrode to be printed on the

carrier foil. It follows that even in the case of complex electrode configurations, e.g. in the case of comb-shaped electrodes, the region in which a material is applied directly to the carrier foil has a generally convex form. The application of a layer of dielectric material, which covers the entire electrode region, thus prevents the substrate to deform inhomogeneously in the electrode region of the active area. Even if the carrier foil deforms as a result of the application of the dielectric layer, such deformation is substantially homogeneous over the electrode region and may accordingly controlled or compensated. Accordingly, the configuration of the electrodes and carrier foil arrangement is not altered in an uncontrolled manner by the manufacturing process so that the production of switching elements which are not conform to the specifications can be considerably reduced.

The dielectric material can be chosen from a wide range of suitable materials, such as e.g. PUR resin, epoxy resin, phenoxy resin, silicone resin, etc.. It should be noted that the dielectric material is preferably chosen so as to reduce the stress at the boundary layer between the carrier foil and the application layer such that the deformation of the carrier foil during the application thereof is minimized. It will further be noted that the dielectric layer may also act as a primer, which enhances the adhesion of the printed conductive electrode material, e.g. a silver ink.

Depending on the dielectric material and on the thickness of the dielectric layer, the mechanical properties of the membrane system (carrier foil & dielectric layer) may be influenced by the application of a suitable dielectric material. It is for instance possible to increase the stiffness of the membrane so as to control the deflection of the membrane under the action of a pressure acting on the active area of the switching element. It follows that the mechanical response of the switching element may be influenced in a controlled manner by the application of a suitable dielectric material.

It will be noted that an electrode having a convex form, e.g. a disk shaped electrode, is less susceptible to cause inhomogeneous deformations of the carrier foil than an electrode having a complex configuration such as an elec-

trode having a comb-shaped form, or the form of a ring segment or any other non-convex form. In fact, such complex configuration of the electrode, e.g. a comb-shaped electrode, an electrode in the form of a ring segment, is the main cause for inhomogeneous deformation of the carrier foil. It follows that the layer  
5 of dielectric material is preferably applied to the carrier foil, onto which an electrode having a complex configuration is to be printed.

However in a preferred embodiment of the invention, a layer of dielectric material is applied on each of said carrier foils, independent of the configuration of the electrode(s). It follows that in this embodiment, a layer of dielectric  
10 material is also applied onto said second carrier foil between the second carrier foil and an electrode arranged on said second carrier foil. This embodiment of the switching element has the advantage, that both carrier foils are provided with similar mechanical properties and that accordingly the switching element shows a similar mechanical or electrical response independently of the side on  
15 which a force is acting on the active area.

It will however be noted, that depending on the application, the different dielectric layers of both carrier foils may be made of a different material or have a different thickness, such that the mechanical properties of the first and the second membrane system differ from each other and the switching element  
20 shows an asymmetric behaviour.

In a preferred embodiment of the invention, the layer of dielectric material is applied on the respective carrier foil in substantially the entire area of said active area. The coating of the entire area of the active area ensures that any deformation caused by the application of the dielectric layer will be homogenous  
25 over the entire active area of the switching element. Furthermore, inhomogeneous deformations due to a misalignment of the printed electrode in the active area are effectively excluded.

In a variant of this embodiment, the said layer of dielectric material is applied on the respective carrier foil in the entire area of said active area and extends  
30 laterally beyond said active area. This means that an outer border of the layer of dielectric material is arranged between the carrier foil and the spacer material.

With this embodiment, the entire area of the active zone is reliably covered even in the case of slight misalignment of the spacer and the carrier foil. The fabrication of switching element which are out of specification can thus be reduced.

- 5 In a further embodiment, the said layer of dielectric material is applied on the respective carrier foil on the complete surface of said carrier foil. While this embodiment increases the amount of dielectric material used, its fabrication process is considerably simplified compared with the fabrication process of the preceding embodiments.
- 10 In a very simple and cost-effective fabrication process, the layer of dielectric material is printed onto said carrier foil, e.g. by a screen printing process. Such printing processes are well known in the art and permit to apply high quality layers of printable materials in a desired thickness. It will be noted, that for general applications of the switching elements, the thickness of the dielectric
- 15 layer should be as small as possible in order not to alter the mechanical properties of the carrier foil. The thickness of the dielectric layer will therefore usually be much smaller than the thickness of the carrier foil. One possible thickness of the dielectric layer is in the range of 10% of the thickness of the carrier foil. This ratio may however considerably vary in the case of specific
- 20 applications. Furthermore, depending on the application and on the desired mechanical response of the switching element, the thickness of the dielectric layer may not be uniform over the entire area. In other words, depending on the embodiment of the switching element, the thickness of said layer of dielectric material varies over the active area.
- 25 The skilled person will appreciate, that the present invention is applicable to simple membrane switches as well as to pressure sensitive switches. In case of a simple membrane switch a first electrode is arranged on an inner surface of said first carrier foil and a second electrode is arranged on an inner surface of the second carrier foil in a facing relationship with said first electrode. In a
- 30 variant of a simple switch, a first and a second electrode are arranged side by side on an inner surface of said first carrier foil and a shunt element is arranged

on an inner surface of the second carrier foil in facing relationship with said first and second electrodes. The two electrodes may e.g. comprise a comb shaped configuration, with the teeth of the two electrodes being arranged in an interdigitating relationship. Foil-type pressure sensors are similarly configured as the  
5 above described switches. In contrast to the switches, at least one of said first and second electrode is covered by a pressure-sensitive resistive material. In an alternative embodiment, the said shunt element comprises a resistive material. Due to the pressure-sensitive resistive or semi-conducting material, the electrical resistance between the electrodes of these pressure sensors  
10 depends on the pressure with which the two carrier foils are pressed together.

***Detailed description with respect to the figures***

The present invention will be more apparent from the following description of several not limiting embodiments with reference to the attached drawings, wherein

15 Fig.1: shows an embodiment of a switching element having two active areas covered with dielectric material;

Fig.2: shows an embodiment of a switching element having two active areas, wherein the layers of dielectric material extend beyond the active area

Fig.3: shows an embodiment of a switching element having two active areas, wherein the layer of dielectric material covers the entire carrier foil.

20 Different embodiments of the present invention are schematically illustrated in the figures for a simple membrane switch 10 having two active areas 12 and 14. The switching element 10 comprises a first carrier foil 16 and a second carrier foil 18, which are arranged at a certain distance  $d$  by means of a spacer 20. The spacer 20 comprises two recesses or cut-outs 22 such that the spacer 20  
25 surrounds the active areas 12 and 14 of the switching element 10. Electrodes 24 are arranged in each active area 12 and 14 on the inner surfaces of the carrier foils 16 and 18 in such a way that an electrical contact is established between the electrodes 24 if said carrier foils are pressed together. In the shown embodiment, one electrode 24 is arranged on each of said carrier foils in



a facing relationship. It should however be noted that other layouts, e.g. with two spaced electrodes arranged on one of the carrier foils and a shunt element arranged on the second carrier foil, are also possible.

A layer of dielectric material 26 is applied on each carrier foil between the carrier foil and the respective electrode. The dielectric material is preferably printed onto the carrier foil at least in the entire electrode region, i.e. in a region, which is delimited by a generally convex outline circumscribing the electrode to be printed on the carrier foil. It follows that the electrode, which may have a complex configuration, is subsequently printed onto the layer of dielectric material.

In the embodiment of fig. 1, the layers of dielectric material 26 covers the carrier foils 16 and 18 over the entire area of the respective active areas 12 or 14. In the embodiment shown in fig. 2, the layer of dielectric material 16 is applied on the respective carrier foil in the entire area of said active area and extends laterally beyond said active area. The layer of dielectric material accordingly extends in the spacer region of the switching element. In the third embodiment shown in fig. 3, the layer of dielectric material extends over the entire surface of the respective carrier foils.

#### ***List of reference signs***




- 10 switching element
- 20 12, 14 active areas
- 16 first carrier foil
- 18 second carrier foil
- 20 spacer
- 22 recess or cut-out
- 25 24 electrodes
- 26 layer of dielectric material

## Claims

1. Foil-type switching element comprising  
a first carrier foil and a second carrier foil arranged at a certain distance  
from each other by means of a spacer, said spacer comprising at least one  
recess defining an active area of the switching element, and  
5 at least two electrodes arranged in the active area of the switching element  
between said first and second carrier foils in such a way that, in response to  
a pressure acting on the active area of the switching element, the first and  
second carrier foils are pressed together against the reaction force of the  
elastic carrier foils and an electrical contact is established between the at  
10 least two electrodes,  
characterized by a layer of dielectric material, said dielectric material being  
applied onto said first carrier foil between the carrier foil and an electrode  
arranged on said first carrier foil, said layer of dielectric material covering at  
least a region of the first carrier foil which is delimited by a generally outer  
15 periphery of the electrode arranged on said first carrier foil.
2. Foil-type switching element according to claim 1, wherein a layer of dielectric material is applied onto said second carrier foil between the second carrier foil and an electrode arranged on said second carrier foil.
3. Foil-type switching element according to claim 1 or 2, wherein said layer of  
20 dielectric material is applied on the respective carrier foil in substantially the  
entire area of said active area.
4. Foil-type switching element according to claim 1 or 2, wherein said layer of  
dielectric material is applied on the respective carrier foil in the entire area  
of said active area and extends laterally beyond said active area.
- 25 5. Foil-type switching element according to claim 1 or 2, wherein said layer of  
dielectric material is applied on the respective carrier foil on the complete  
surface of said carrier foil.
6. Foil-type switching element according to any one of the preceding claims,  
wherein said layer of dielectric material is printed onto said carrier foil.

7. Foil-type switching element according to any one of the preceding claims, wherein a thickness of said layer of dielectric material varies over the active area.

10/538400

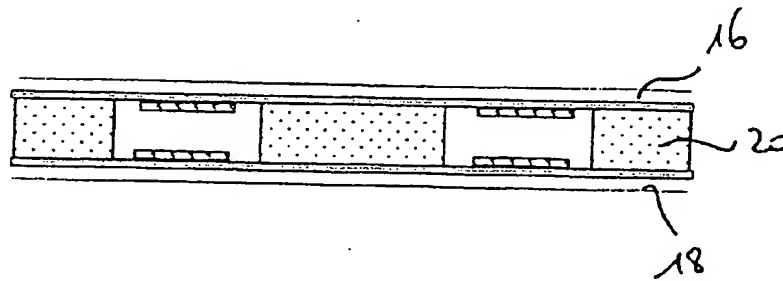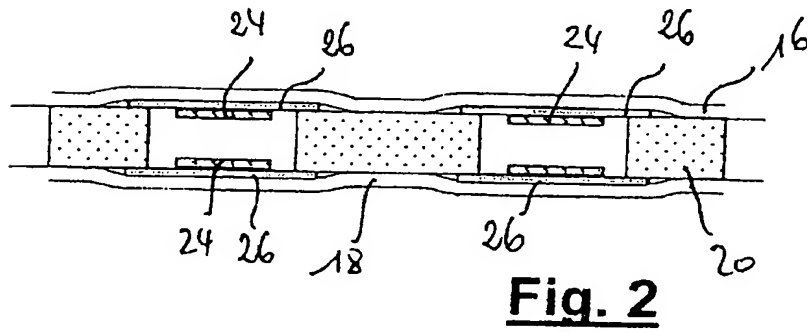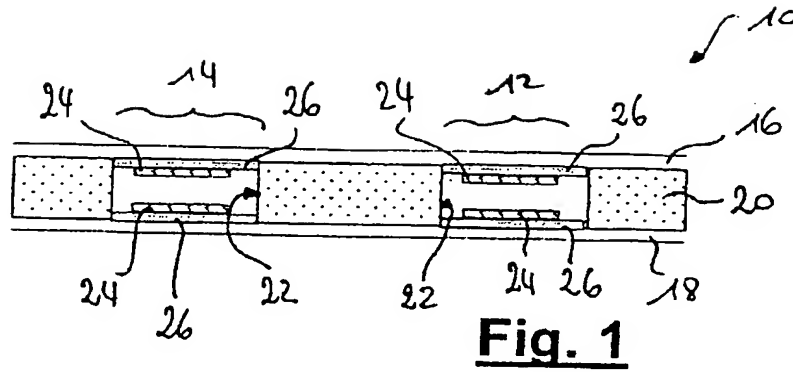

**Fig. 3**

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50962

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01H13/70

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H05K H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 871 842 A (SILVA NEILL N ET AL) 16 February 1999 (1999-02-16) the whole document	1-6
Y	--- PATENT ABSTRACTS OF JAPAN vol. 013, no. 453 (E-831), 11 October 1989 (1989-10-11) & JP 01 176615 A (MATSUSHITA ELECTRIC IND CO LTD), 13 July 1989 (1989-07-13) abstract; figure 1	1-6
A	--- DE 36 28 781 A (FLOHR HEINER;VOGT SIEGFRIED) 5 March 1987 (1987-03-05) column 2, line 40 - line 58 --- -/--	1,3-5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

9 March 2004

Date of mailing of the international search report

18/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ramírez Fueyo, M

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50962

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 271 482 B1 (CROTZER DAVID R ET AL) 7 August 2001 (2001-08-07) column 3, line 65 -column 5, line 33; figures 1,2 -----	1,3,6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/50962

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5871842	A	16-02-1999	US 5949029 A	07-09-1999
			CA 2244868 A1	11-06-1998
			CN 1210480 A ,B	10-03-1999
			DE 69725975 D1	11-12-2003
			EP 0895486 A1	10-02-1999
			JP 2000504283 T	11-04-2000
			JP 3234606 B2	04-12-2001
			WO 9824558 A1	11-06-1998
			CA 2241530 A1	07-05-1998
			DE 69627389 D1	15-05-2003
			EP 0912335 A1	06-05-1999
			JP 2002514342 T	14-05-2002
			WO 9818615 A1	07-05-1998
			US 6271482 B1	07-08-2001
			US 6180221 B1	30-01-2001
			US 5977489 A	02-11-1999
			US 6117539 A	12-09-2000
<hr/>				
JP 01176615	A	13-07-1989	NONE	
<hr/>				
DE 3628781	A	05-03-1987	DE 3628781 A1	05-03-1987
<hr/>				
US 6271482	B1	07-08-2001	US 5949029 A	07-09-1999
			US 5600099 A	04-02-1997
			US 5599193 A	04-02-1997
			CA 2293110 C	02-12-2003
			CN 1259768 A	12-07-2000
			EP 1032079 A1	30-08-2000
			JP 2000200636 A	18-07-2000
			CA 2241530 A1	07-05-1998
			DE 69627389 D1	15-05-2003
			EP 0912335 A1	06-05-1999
			JP 2002514342 T	14-05-2002
			WO 9818615 A1	07-05-1998
			US 5871842 A	16-02-1999
			US 6180221 B1	30-01-2001
			US 5977489 A	02-11-1999
			US 6117539 A	12-09-2000
			CA 2206643 A1	06-06-1996
			CN 1167563 A ,B	10-12-1997
			DE 69527851 D1	26-09-2002
			DE 69527851 T2	24-04-2003
			EP 0795262 A1	17-09-1997
			JP 10510094 T	29-09-1998
			WO 9617501 A1	06-06-1996